


MPR 금속판저항기 METAL PLATE RESISTORS (SHUNT)


<AXIAL TYPE> Non-inductive

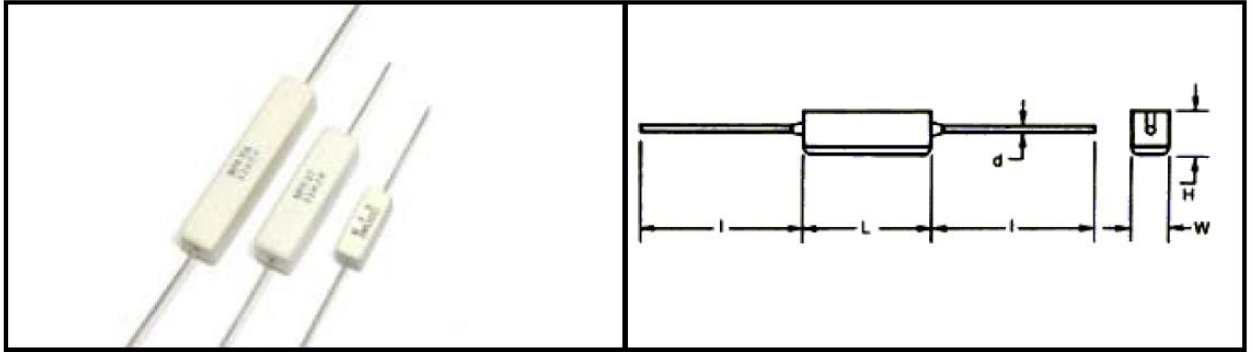

■ 일반규격 및 촌법 GENERAL SPECIFICATIONS & DIMENSIONS

형 명 Type	정격전력 Rated Wattage	저항치범위 Resistance Range	최대허용전류 Maximum Current	촌 법 Dimensions [mm]				
				L±1	W±1	H±1	l±Min	d±0.02
MPR 1A	1W	0.005 ~ 0.03Ω	5A	13.0	6.5	7.0	30	0.8
MPR 2A	2W	0.005 ~ 0.05Ω	10A	18.0	6.5	7.0	30	0.8
MPR 3A	3W	0.005 ~ 0.10Ω	10A	22.0	8.0	8.5	30	0.8
MPR 5A	5W	0.005 ~ 0.10Ω	10A	21.5	9.5	9.5	30	0.8
MPR 7A	7W	0.01 ~ 0.120Ω	10A	34.5	9.5	9.5	30	0.8
MPR 10A	10W	0.01 ~ 0.300Ω	20A	48.0	9.5	9.5	30	1.0
MPR 15A	15W	0.01 ~ 0.300Ω	20A	48.0	12.5	12.5	30	1.0
MPR 20A	20W	0.01 ~ 0.400Ω	20A	62.5	12.5	12.5	30	1.0

<RADIAL TYPE> Non-inductive

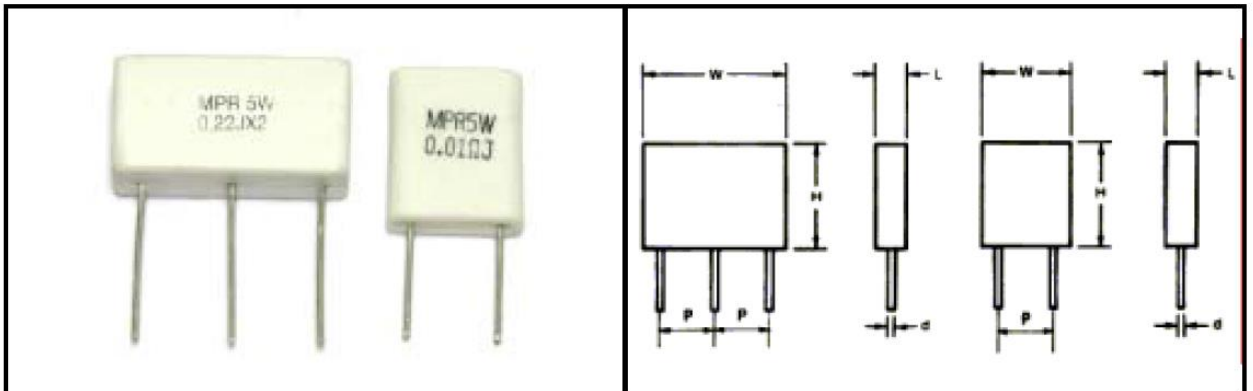

■ 일반규격 및 촌법 GENERAL SPECIFICATIONS & DIMENSIONS

형 명 Type	정격전력 Rated Wattage	저항치범위 Resistance Range	최대허용전류 Maximum Current	촌 법 Dimensions [mm]				
				L±0.5	W±1	H±1	P±0.5	d±0.02
MPR 2R	2W	0.005 ~ 0.5Ω	10A	5	14	13.5	10	0.8
MPR 3R	3W	0.005 ~ 0.5Ω	10A	5	14	13.5	10	0.8
MPR 5R(S)	5W	0.005 ~ 0.6Ω	10A	5	14	18.5	10	0.8
MPR 5R	5W	0.005 ~ 0.8Ω	10A	5	26	12.0	20	0.8
MPR 33R	3W+3W	0.01 ~ 0.47Ω	10A	5	26	13.5	10	0.8
MPR 33R(L)	3W+3W	0.01 ~ 0.47Ω	20A	8	26	13.5	10	0.8
MPR 55R	5W+5W	0.01 ~ 0.47Ω	20A	5	26	17.0	10	0.8
MPR 55R(L)	5W+5W	0.01 ~ 0.47Ω	20A	8	26	17.0	10	0.8